

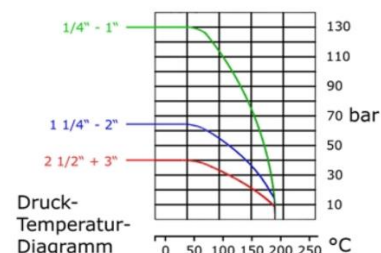


Muffenkugelhahn DIN3202 M3

2-teilig, voller Durchgang, mit Schließlasche



DN	G	L	d	H	L2	Cv	Nm	PN	kg
8	1/4"	60	11,6	56	102	6,6	6,0	130	0,220
10	3/8"	60	12,7	56	102	7,9	8,0	130	0,206
15	1/2"	75	15,0	65	123	11,2	11,0	130	0,360
20	3/4"	80	20,0	68	123	21,0	14,0	130	0,450
25	1"	90	25,0	79	153	35,0	18,0	130	0,730
32	1 1/4"	110	32,0	84	153	57,0	28,0	63	1,160
40	1 1/2"	120	40,0	94	183	80,0	45,0	63	2,080
50	2"	140	50,0	100	183	148,0	52,0	63	3,000
65	2 1/2"	185	65,0	145	246	265,0	67,0	40	6,515
80	3"	205	80,0	155	246	415,0	95,0	20	9,900

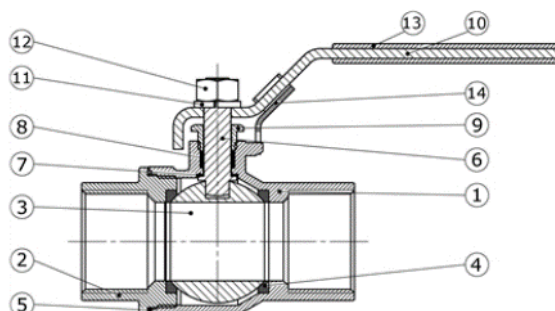

STÜCKLISTE

Nr.	Bezeichnung	Material
1.	Gehäuse	V4A (CF8M/ 1.4408)
2.	Einschraubflansch	V4A (CF8M/ 1.4408)
3.	Kugel	V4A (CF8M/ 1.4408)
4.	Kugeldichtung (2x)	PTFE
5.	Gehäusedichtung	PTFE
6.	Schaltwelle	V4A (CF8M/ 1.4408)
7.	Wellendichtung	PTFE
8.	Stopfbuchsendichtung (2x)	PTFE
9.	Druckschraube	V2A (AISI 304)
10.	Handgriff	V2A (AISI 304)
11.	Federring	V2A (AISI 304)
12.	Mutter	V2A (AISI 304)
13.	Handschutz	PVC (blau)
14.	Sperrvorrichtung	V2A (AISI 304)